

# Технические характеристики на разъединитель и разветвитель Moore Industries SSX и SST

**По вопросам продаж и поддержки обращайтесь:**

Архангельск (8182)63-90-72  
Брянск (4832)59-03-52  
Вологда (8172)26-41-59  
Иваново (4932)77-34-06  
Калининград (4012)72-03-81  
Киров (8332)68-02-04  
Курск (4712)77-13-04  
Москва (495)268-04-70  
Нижний Новгород (831)429-08-12  
Орел (4862)44-53-42  
Пермь (342)205-81-47  
Самара (846)206-03-16  
Смоленск (4812)29-41-54  
Тверь (4822)63-31-35  
Тюмень (3452)66-21-18  
Челябинск (351)202-03-61

Астана +7(7172)727-132  
Владивосток (423)249-28-31  
Воронеж (473)204-51-73  
Ижевск (3412)26-03-58  
Калуга (4842)92-23-67  
Краснодар (861)203-40-90  
Липецк (4742)52-20-81  
Мурманск (8152)59-64-93  
Новокузнецк (3843)20-46-81  
Оренбург (3532)37-68-04  
Ростов-на-Дону (863)308-18-15  
Санкт-Петербург (812)309-46-40  
Сочи (862)225-72-31  
Томск (3822)98-41-53  
Ульяновск (8422)24-23-59  
Череповец (8202)49-02-64

Белгород (4722)40-23-64  
Волгоград (844)278-03-48  
Екатеринбург (343)384-55-89  
Казань (843)206-01-48  
Кемерово (3842)65-04-62  
Красноярск (391)204-63-61  
Магнитогорск (3519)55-03-13  
Набережные Челны (8552)20-53-41  
Новосибирск (383)227-86-73  
Пенза (8412)22-31-16  
Рязань (4912)46-61-64  
Саратов (845)249-38-78  
Ставрополь (8652)20-65-13  
Тула (4872)74-02-29  
Уфа (347)229-48-12  
Ярославль (4852)69-52-93

## Description


Part of Moore Industries' **FS Functional Safety Series**, the exida® approved, SIL 3 capable 2-wire (loop powered) SSX and 4-wire (line/mains powered) SST Safety Isolators and Splitters provide isolation and signal conversion for your SIS (Safety Instrumented System) needs. These units protect and enhance loops and also pass valuable HART® data from the field transmitter to host systems and vice-versa.

**Isolate your SIS** from your Basic Process Control System or monitoring system so disconnections or failures to these secondary systems don't affect your safety system. FMEIDA (Failure Mode Effects and Diagnostic Analysis) reports are available with the required safety data to ensure that risk reduction requirements are met (See Figure 1).

**Protect your safety system** from surges, spikes and transients in the field. With 1500Vrms isolating capability, the SSX/SST protects your safety I/O cards and system from the rigors of plant environments.

**With built-in HART pass-through technology** you can rest assured that when your loops use HART transmitters that critical and valuable HART diagnostic, process, and calibration information can be read on either side of the SSX/SST. Most all other isolators block and "strip off" the HART signal.

**Figure 1.** The 2-wire SSX provides safety system isolation while still allowing valuable HART data to pass.

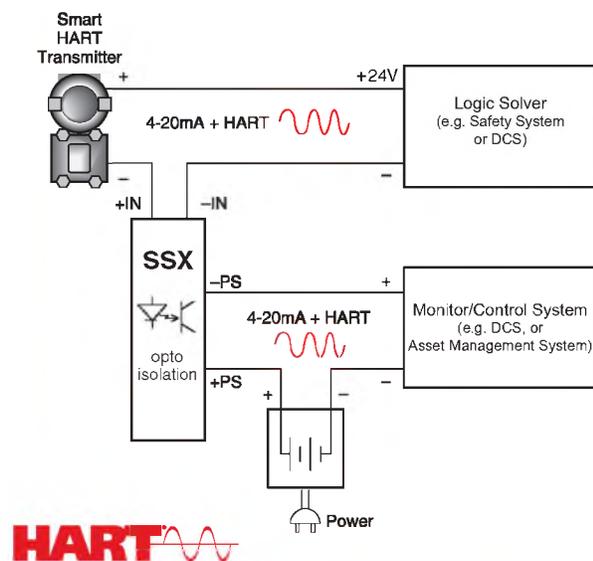

**The rugged metal DIN housing** of the SSX/SST Safety Series Isolator and Splitter snaps securely onto G-type and Top Hat rails.

## Features

- **exida certified IEC 61508:2010.** exida has certified the SSX/SST for use in an SIS up to SIL 3 in monitor mode, where only the input circuit is part of the safety function. For single use mode, the SSX/SST is approved for use in an SIS up to SIL 2.
- **Comprehensive FMEIDA certified safety data.** Upon request, exida-certified FMEIDA data is provided to be used by a functional safety practitioner to determine the SST's and SSX's applicability in specific safety-related applications.
- **Valuable HART data not lost.** Both the SSX and SST pass critical HART data to asset management systems, programming devices or host systems.
- **Split signals between two locations.** The 4-Wire SST takes in one signal and gives you two fully isolated outputs that can be taken to two separate receiving devices. This facilitates maintenance on either output loop without losing the signal on the other output loop.
- **RFI/EMI Protection.** Standard 20V/m protection offered to protect against harmful effects of radio frequency and electromagnetic interference.
- **Transmitter excitation.** The 4-wire SST is capable of providing loop power to a 2-wire transmitter that is connected to its input.

**Certifications (See Page 2 for details)**



### 2-Wire, Loop Powered SSX

The SSX is a 2-wire isolator, drawing power from the output side of the loop. Typically, this is from a secondary receiving device such as a DCS or PLC.

#### Isolation for Safety Systems

Use the SSX to isolate your SIS from your basic process control system. While power for the SSX is derived from the output side of the loop, disconnection or loss of power will not affect the input loop's signal integrity. This allows maintenance to be performed on the non-critical side of the loop (See Figure 2).

#### Isolate and Pass Critical HART Data

When HART data is required for diagnostics, maintenance or calibration the SSX is able to isolate and pass HART data from the transmitter to the host system (See Figure 3).


#### Stop Ground Loop Noise and Convert Signals

Difference in potential between a grounded transmitter and a grounded receiving device may result in unpredictable ground loop problems that can lead to signal drift. The SSX breaks the galvanic path between the field instrument and receiving device and even converts signals when required (See Figure 4).


#### Solve "Bucking" Power Supplies and Filter HART

When two devices (such as a 4-wire HART transmitter and a DCS) are trying to source power to the same loop, the result is a non-functioning loop. When neither of the devices can be eliminated, the solution is an SSX. It can operate with powered inputs from both sides, thus restoring normal operations to the loop while also passing any HART signals. Sometimes older DCS and PLC input cards have trouble with HART signals. When this problem arises you can order the SSX with option code **-0HART** and the SSX will filter the HART signal (See Figure 5).


**Figure 2.** The SSX provides isolation for your safety system and still allows maintenance on the output side of the loop.

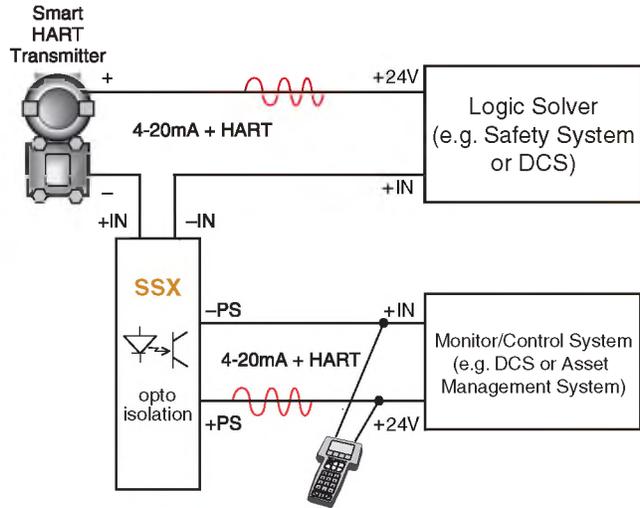


**Figure 3.** The SSX passes HART data to asset management systems or other host control and monitoring systems.

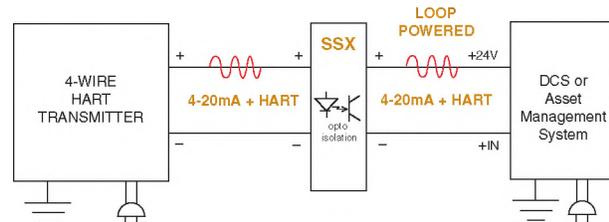

**Figure 4.** The SSX can also serve as a signal converter.

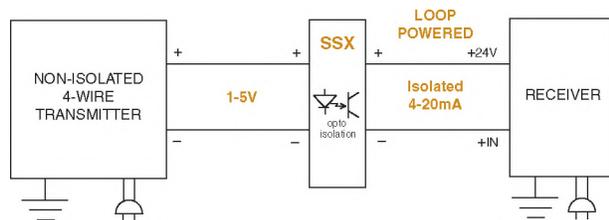

**Figure 5.** The SSX solves bucking power supplies. Also, when used with the **-0HART** option, the SSX acts as a current isolator that stops a HART signal from reaching a PLC, DCS or other receiving device.

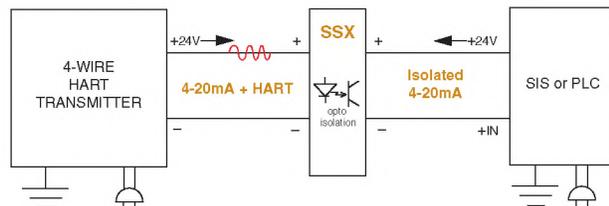

#### Certifications



**exida Certified** - IEC 61508 2010  
Functional Safety of Electrical/Electronic/  
Programmable Electronic Safety-Related Systems



**CE Conformant** - EMC Directive 2014/30/EU  
EN61326; Low Voltage Directive - 2014/35/EU  
EN61010



**FM Approvals (FM Global):**  
**Non-Incendive**

Class I, Division 2, Groups A, B, C and D  
Temperature Class T4, Tamb = -40°C to +85°C

## 4-Wire Line/Mains Powered SST and SST Splitter

The SST is a 4-wire unit powered by 24DC, 117AC or 230AC. It is designed for applications where line/mains power is readily available, such as the back of a panel or inside of a control room.

### HART Splitter: “Sharing” or “Splitting” Process Signals

The SST Splitter takes the input from one of your process signals and creates two identical, completely isolated outputs to two separate monitoring or control devices. Additionally, the SST functions as a HART splitter that passes valuable HART data to one or both of the SST’s independent outputs. This is especially important when asset management systems need to maintain a digital HART connection with critical valves or instruments for diagnostic monitoring or calibration record keeping. This also makes it very convenient when using HART handhelds, modems or programming devices to configure remote field transmitters from control rooms (See Figure 6).


### Power a 2-Wire Transmitter

With the included -TX option, the SST provides 24V power to a 2-wire, output-loop powered instrument. This eliminates the need for an additional power supply (See Figure 7).


### Single- and Multiple-Unit Instrument Enclosures

Designed to meet NEMA 4X and IP66 ratings, the R-BOX is the perfect solution for protecting the SST/SSX in field and control room applications. Rugged and versatile, it delivers a high impact structure and resistance to ultraviolet rays and chemicals. The R-BOX mounts on a pipe, panel or surface, and comes in a variety of widths to economically accommodate several SSTs or SSXs. It features a pre-installed mounting rail; customizable conduit entry options; a clear cover and a secure locking mechanism. For more information, see the R-BOX Field-Mount Enclosure datasheet (See Figure 8).


**Figure 6.** The SST Splitter takes one process signal and delivers two completely isolated signal outputs. HART data can be passed to one or both outputs.

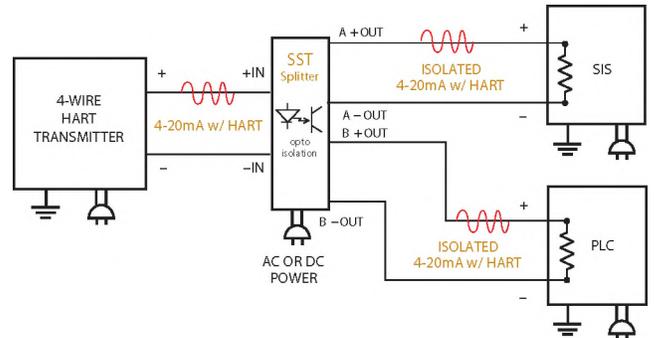

**Figure 7.** The standard -TX Transmitter Excitation of the SST allows it to supply loop power to a 2-wire transmitter.

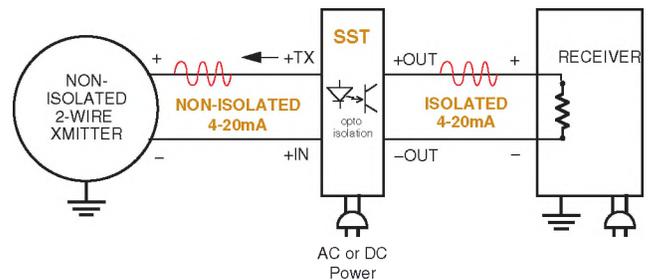

**Figure 8.** Available in a variety of widths, our R-BOX field-mount instrument enclosure is designed to protect DIN-rail instruments in even the most rugged environments

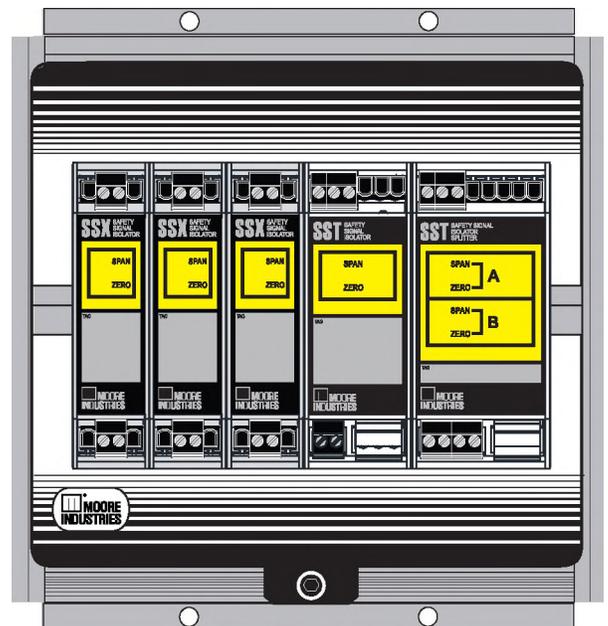



# SSX/SST **FS** FUNCTIONAL SAFETY SERIES

## Safety Series Isolator and Splitter

Figure 9. Dimensions of the SSX Isolator in its aluminum DIN-style housing


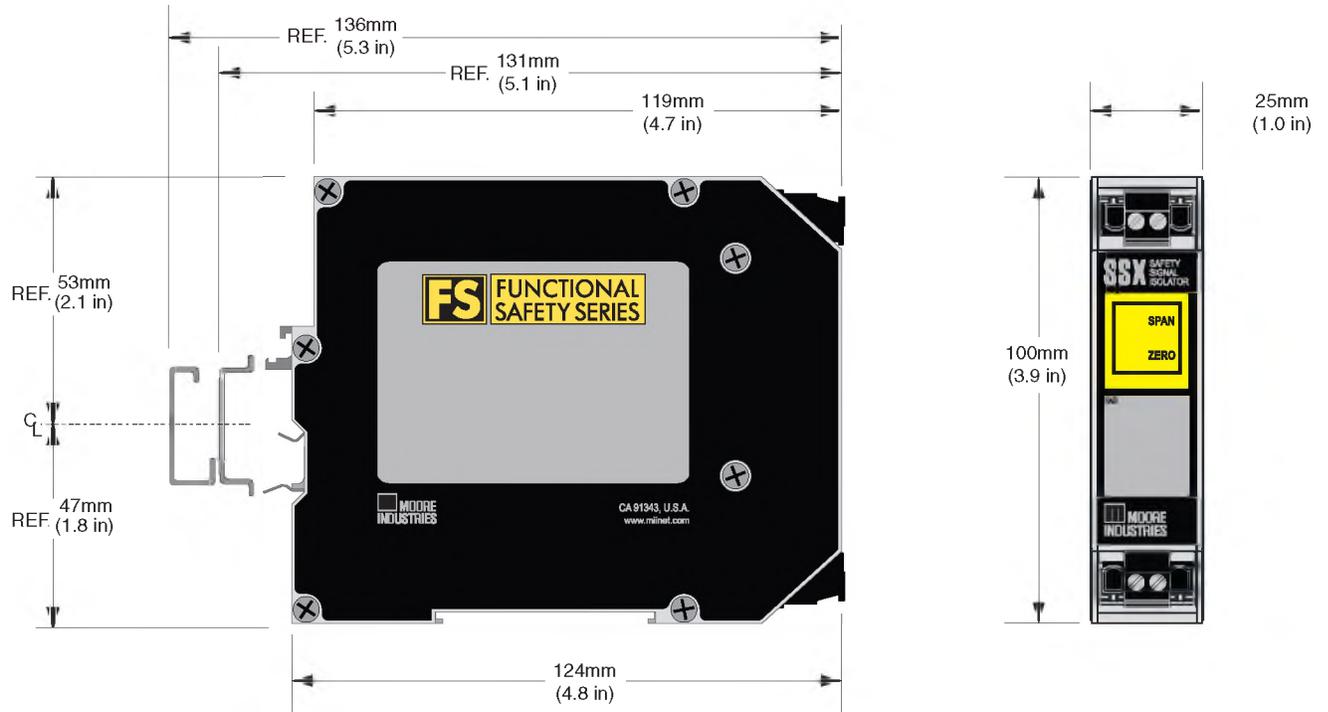


Figure 10. Dimensions of the SST Isolator in its aluminum DIN-style housing

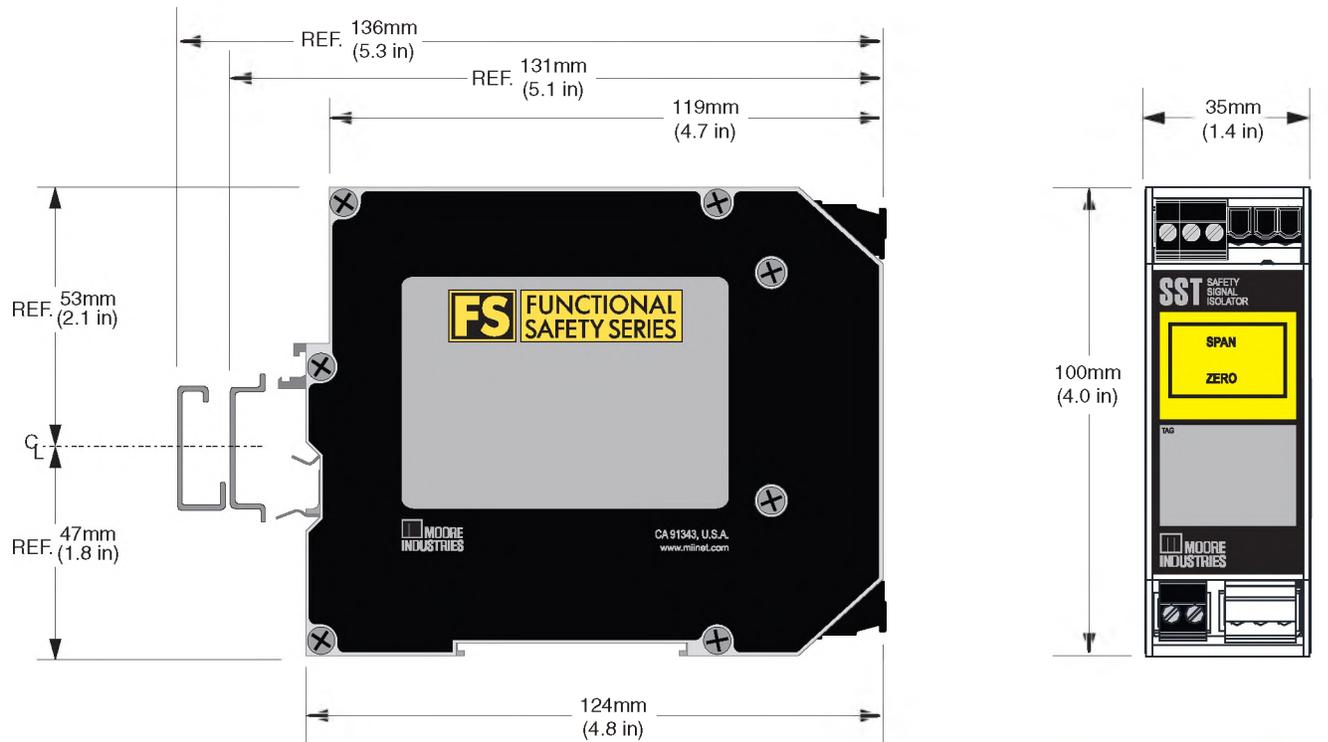

# SSX/SST **FS** FUNCTIONAL SAFETY SERIES

## Safety Series Isolator and Splitter

Figure 11. Dimensions of the SST Splitter in its aluminum DIN-style housing


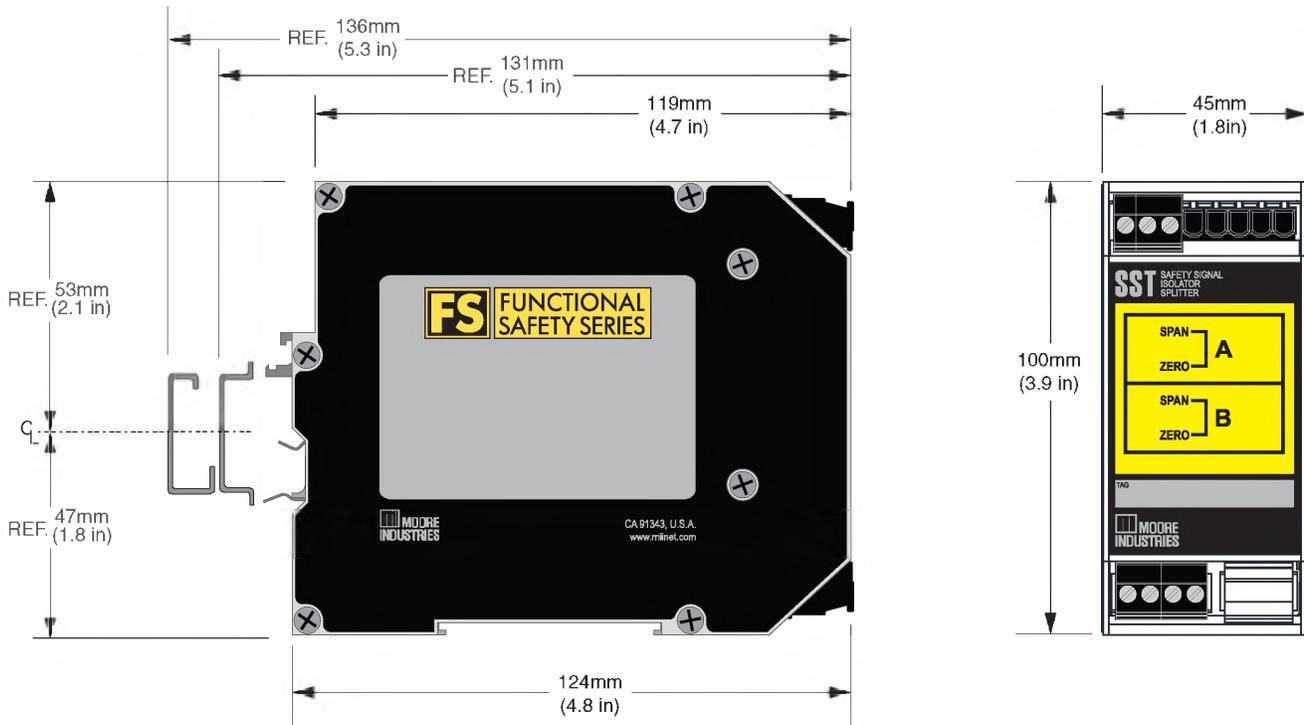


Figure 12. The SST Splitter and the SST and SSX Isolators mounted with the FLB flange bracket and the bracket's dimensions.

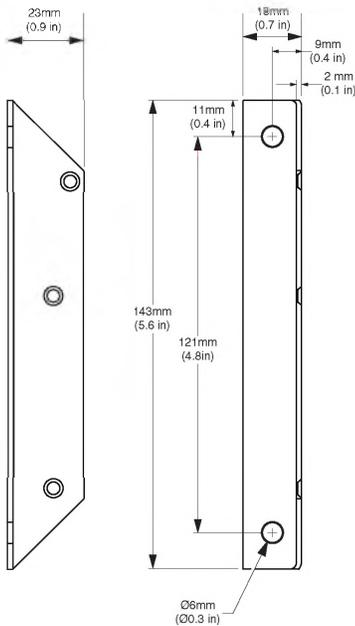

**По вопросам продаж и поддержки обращайтесь:**

Архангельск (8182)63-90-72  
Брянск (4832)59-03-52  
Вологда (8172)26-41-59  
Иваново (4932)77-34-06  
Калининград (4012)72-03-81  
Киров (8332)68-02-04  
Курск (4712)77-13-04  
Москва (495)268-04-70  
Нижний Новгород (831)429-08-12  
Орел (4862)44-53-42  
Пермь (342)205-81-47  
Самара (846)206-03-16  
Смоленск (4812)29-41-54  
Тверь (4822)63-31-35  
Тюмень (3452)66-21-18  
Челябинск (351)202-03-61

Астана +7(7172)727-132  
Владивосток (423)249-28-31  
Воронеж (473)204-51-73  
Ижевск (3412)26-03-58  
Калуга (4842)92-23-67  
Краснодар (861)203-40-90  
Липецк (4742)52-20-81  
Мурманск (8152)59-64-93  
Новокузнецк (3843)20-46-81  
Оренбург (3532)37-68-04  
Ростов-на-Дону (863)308-18-15  
Санкт-Петербург (812)309-46-40  
Сочи (862)225-72-31  
Томск (3822)98-41-53  
Ульяновск (8422)24-23-59  
Череповец (8202)49-02-64

Белгород (4722)40-23-64  
Волгоград (844)278-03-48  
Екатеринбург (343)384-55-89  
Казань (843)206-01-48  
Кемерово (3842)65-04-62  
Красноярск (391)204-63-61  
Магнитогорск (3519)55-03-13  
Набережные Челны (8552)20-53-41  
Новосибирск (383)227-86-73  
Пенза (8412)22-31-16  
Рязань (4912)46-61-64  
Саратов (845)249-38-78  
Ставрополь (8652)20-65-13  
Тула (4872)74-02-29  
Уфа (347)229-48-12  
Ярославль (4852)69-52-93

**Эл. почта: [mpr@nt-rt.ru](mailto:mpr@nt-rt.ru) || Сайт: <http://moore.nt-rt.ru/>**